

## imageRUNNER ADVANCE DX C357iF Series

Color  
Compact  
Multifunction

Print up to 36 ppm (BW/color)

Scan up to 200 ipm (300 dpi) (BW/color, duplex)

Print up to 8-1/2" × 14"

2,300-sheet maximum paper capacity

Canon's comprehensive portfolio of imageRUNNER ADVANCE DX multifunction printers and integrated solutions can help **simplify** the end user experience and management of technology, better **control** sensitive information and print-related costs, and help ensure that technology investments proactively **evolve** with changing needs.



### WORKFLOW EFFICIENCY

- 10.1" intuitive touch screen with smartphone-like usability.
- A unique, customized experience tailored to individual preferences using My ADVANCE.
- Supports mobile solutions and integration with many popular cloud services like Google Drive.<sup>1</sup>
- Scan and convert documents to searchable digital files in a variety of file formats.
- Integration with Canon and various third-party software with embedded application platform.
- Hot Folders allow users to drag and drop a file into a hot folder and automatically print with pre-defined settings such as number of copies and finishing requirements.



### SECURITY

- Advanced standard security feature set to help safeguard sensitive information and assist in regulatory compliance.
- Integrates with existing, third-party SIEM\*<sup>2</sup> systems to help provide real-time, comprehensive insights into potential threats to the network and printers.
- Technology to verify that the device boot process, firmware, and applications initialize without alteration at startup. McAfee Embedded Control<sup>3</sup> utilizes a whitelist to protect against malware and tampering of firmware and applications.
- Security policy settings can be controlled with a dedicated password, configured from a central location, and exported to other supported devices.
- Control access to the device and specific features, using a host of flexible authentication methods—PIN code, user name/password, or card access.<sup>4</sup>



### QUALITY AND RELIABILITY

- Canon's signature reliability and engine technologies help keep productivity high and minimize the impact on support resources.
- Outstanding imaging technologies and toner allow for consistently striking images, thanks to Canon's V<sup>2</sup> color profile.
- Designed to achieve maximum uptime with status notifications that help keep supplies replenished plus intuitive maintenance videos for consumables replacement.
- imageRUNNER ADVANCE models have received many awards and recognition from leading industry analysts, often referencing strong reliability.



## DEVICE AND FLEET MANAGEMENT

- Designed for quick, easy deployment.
- Remote diagnostics and parts life management for proactive maintenance and rapid fixes.
- Easy and intuitive to monitor device status and consumable levels, turn off devices remotely, observe meter readings, manage settings, and implement security policies.
- Common firmware and regular updates with Unified Firmware Platform (UFP) for continuous improvements and consistency across a fleet.



## COST MANAGEMENT


- Track and assess print, copy, scan, and fax usage and allocate costs to departments or projects.
- Apply print policies and restrict usage by user to help reduce unnecessary printing and contribute to cost efficiency.
- Standard cloud-based solution provides a centralized dashboard with up-to-the-minute insights into printer activity.
- Upgrade to uniFLOW server or cloud-based solutions for full accounting and reporting for compatible Canon and third-party devices, pull printing, job routing, and powerful scan workflows.



## SUSTAINABILITY

- A combination of fusing technologies and low-melting-point toner minimizes power requirements and helps achieve low energy consumption.
- Encourage environmentally conscious work practices by enabling multiple settings that can help save paper and energy.
- ENERGY STAR® certified and rated EPEAT® Gold.<sup>5</sup>

## CONFIGURATION OPTIONS

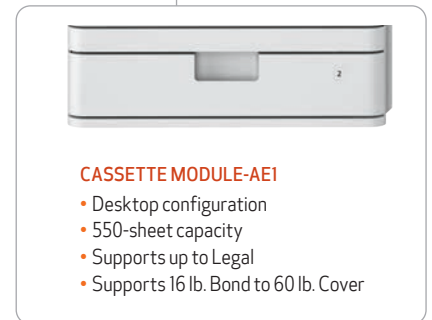

# SPECIFICATIONS

## Main Unit

### Type

Color Laser Multifunctional

### Core Functions

Print, Copy, Scan, Send, Store, Fax

### Processor

1.75GHz Dual Core Processor

### Control Panel

10.1" TFT LCD WSVGA Color Touch-panel

### Memory

3.0 GB RAM

### Hard Disk Drive

320 GB (available disk space: 200 GB)

### Interface Connection

Network: 1000Base-T/100Base-TX/10Base-T,  
Wireless LAN (IEEE 802.11 b/g/n)

Optional: Bluetooth Low Energy

Others

Standard: USB 2.0 x1 (Host), USB 3.0 x1 (Host),  
USB 2.0 x1 (Device)

Optional: Serial Interface, Copy Control Interface

### Paper Capacity (LTR, 20 lb. Bond)

Standard: 650 Sheets

Maximum: 2,300 Sheets

### Paper Sources (LTR, 20 lb. Bond)

Standard: 550-sheet Paper Cassette, 100-sheet  
Multi-Purpose Tray

Optional: 550-sheet Paper Cassette (CASSETTE  
MODULE-AE1), 550-sheet Paper Cassette  
with cabinet (CASSETTE FEEDING UNIT-  
AJ1), Triple 550-sheet Paper Cassettes  
(CASSETTE FEEDING UNIT-AK1)

### Paper Output Capacity (LTR, 20 lb. Bond)

Standard: 250 Sheets

Maximum: 500 Sheets (with STAPLE FINISHER-Z1)

### Finishing Capabilities

Standard: Collate, Group

With External

Finisher: Collate, Group, Offset, Staple

### Supported Media Types

Multi-Purpose Thin, Plain, Heavy, Recycled, Color,  
Tray: Transparency, Pre-punched, Bond,  
Label, Envelope

Paper Thin, Plain, Heavy, Recycled, Color,  
Cassette: Pre-punched, Bond, Envelope

### Supported Media Sizes

Standard Size: Legal, Letter, Executive, Statement  
Custom Size: 3-7/8" x 5-7/8" to 8-1/2" x 14"  
(98.0 x 148.0 mm to 216.0 x 355.6 mm)

Envelopes: COM10 No.10, Monarch, DL, ISO-C5

Envelope 3-7/8" x 5-7/8" to 8-1/2" x 14"

Custom Size: (98.0 x 148.0 mm to 216.0 x 355.6 mm)

### Paper Cassette

Standard size: Legal, Letter, Executive, Statement  
Custom Size: 3-7/8" x 7-1/2" to 8-1/2" x 14"  
(98.0 x 190.5 mm to 216.0 x 355.6 mm)

Envelopes: COM10 No.10, Monarch, DL, ISO-C5

### Supported Media Weights

Cassettes: 16 lb. Bond to 60 lb. Cover (60 to 163 g/m<sup>2</sup>)

Multi-Purpose 16 lb. Bond to 80 lb. Cover (60 to 220 g/m<sup>2</sup>)

Tray:

Duplexing: 16 lb. Bond to 60 lb. Cover (60 to 163 g/m<sup>2</sup>)

### Print/Copy Speed (BW and Color)

C357iF: Up to 36 ppm (Letter);  
Up to 29 ppm (Legal)

C257iF: Up to 26 ppm (Letter);  
Up to 21 ppm (Legal)

### Warm-up Time

From Power On: Approx. 10 Seconds<sup>6</sup>

From Sleep Mode: Approx. 10 Seconds<sup>7</sup>

Quick Startup Mode: Approx. 4 Seconds<sup>8</sup>

Mode:

### Dimensions (W x D x H)

Standard 20-1/2" x 25-7/8" x 25-1/8"

(Desktop): (519 mm x 658 mm x 638 mm)

### Installation Space (W x D)

Basic: 33-1/2" x 35-3/4" (852 mm x 908 mm)  
(with Paper Cassette Open + Multi-Purpose  
Tray Extended)

Fully Configured: 55-3/8" x 35-3/4" (1407 mm x 908 mm)

(with Staple Finisher-Z1 + Paper Cassette  
Open + Multi-Purpose Tray Extended)

### Weight<sup>9</sup>

Standard (Desktop): Approx. 108 lb. (49 kg)

## Print Specifications

### Print Resolution (dpi)

1200 x 600

### Standard Page Description Languages

UFR II, PCL<sup>®</sup>6, Adobe<sup>®</sup> PS<sup>®</sup> 3

### Supported File Types

PDF, TIFF, JPEG, EPS, XPS

### Printing from Mobile Devices and Cloud-based Services

A range of standard and optional software and MEAP-based solutions (including AirPrint, Mopria, Universal Print by Microsoft<sup>®</sup>, Canon PRINT Business, and uniFLOW Online) are available to provide printing from mobile devices or internet-connected devices and cloud-based services depending on your requirements. Please contact your sales representative for further information.

### Fonts

PCL: 93 Roman, 10 Bitmap fonts, 2 OCR fonts,  
Andalé Mono WT J/K/S/T (Japanese,  
Korean, Simplified and Traditional Chinese),<sup>10</sup>  
Barcode Fonts<sup>11</sup>

PS: 136 Roman

### Operating System<sup>12</sup>

UFR II/PS: Windows<sup>®</sup> 7/8.1/10/Server 2008/  
Server 2008 R2/Server 2012/  
Server 2012 R2/Server 2016/  
Server 2019, Mac OS X (10.10 or later)

PCL: Windows<sup>®</sup> 7/8.1/10/Server 2008/Server  
2008 R2/Server 2012/Server 2012 R2/  
Server 2016/Server 2019

PPD: Windows<sup>®</sup> 7/8.1/10, Mac OS X (10.9 or later)

## Copy Specifications

### First-Copy-Out Time (LTR)

C357iF: As fast as 5.1 seconds (BW)/  
6.9 seconds (Color)

C257iF: As fast as 6.9 seconds (BW)/  
9.4 seconds (Color)

### Copy Resolution (dpi)

With Platen: 600 x 600

With DADF: 300 x 600

### Multiple Copies

Up to 999

### Magnification

25%-400% (1% Increments)

### Preset Reduction/Enlargement:

25%, 50%, 64%, 78%, 100% (1:1), 129%, 200%, 400%

## Scan Specifications

### Type

Single-pass Duplexing Automatic Document Feeder<sup>13</sup>

### Document Feeder Paper Capacity

Up to 100 Sheets (20 lb. Bond)

### Document Feeder Supported Media Sizes

Legal, Letter, Statement

Custom Size: 1-7/8" x 5" to 8-1/2" x 14" (48.0 mm x

128.0 mm to 216.0 mm x 355.6 mm)

Business Card: 1-7/8" x 3-3/8" to 2-1/8" x 3-5/8" (48.0 mm x

85.0 mm to 55.0 mm x 91.0 mm)

### Document Feeder Supported Media Weights

One-Sided 13.3 to 34 lb. Bond (50 to 128 gsm) (BW), 17 to

Scanning: 34 lb. Bond (64 to 128 gsm) (CL)

Two-Sided 13.3 to 34 lb. Bond (50 to 128 gsm) (BW), 17 to

Scanning: 34 lb. Bond (64 to 128 gsm) (CL)

Note:

Business Card: 21.3 lb bond to 80 lb cover (80 to 220 gsm)

### Platen Acceptable Originals

Sheet, Book, 3-Dimensional Objects

### Pull Scan

Color Network ScanGear2 for both Twain and WIA

Supported OS: Windows<sup>®</sup> 7/8.1/10/Server 2008/  
Server 2008 R2/Server 2012/  
Server 2012 R2/Server 2016

### Scan Resolution (dpi)

Scan for Copy: 600 x 600

Scan for Send: (Push) 600 x 600 (SMB/FTP/WebDAV/IFAX),  
(Pull) 600 x 600

Scan for Fax: 600 x 600

### Scan to Mobile Devices and Cloud-based Services

A range of solutions is available to provide scanning to compatible mobile devices and certain cloud-based services depending on your requirements.

### Scan Speed (LTR)

Send: Automatic Color Select "OFF" (300 x 300 dpi):

Single-Sided Scanning: 100 ipm

Double-Sided Scanning: 200 ipm

Automatic Color Select "ON" (300 x 300 dpi):

Single-Sided Scanning: 50 ipm

Double-Sided Scanning: 100 ipm

Copy: Scan Speed priority (300 x 600 dpi):

Single-Sided Scanning: 50 ipm

Double-Sided Scanning: 100 ipm

Image Quality priority (600 x 600 dpi):

Single-Sided Scanning: 30 ipm

Double-Sided Scanning: 50 ipm

## Send Specifications

### Destination

Email/Internet Fax (SMTP), SMB v3.0, FTP, WebDAV, Mail  
Box, Super G3 Fax, IP Fax (Optional)

### Address Book

LDAP (2,000)/Local (1,600)/Speed Dial (200)

### Send Resolution (dpi)

Push: Up to 600 x 600

Pull: Up to 600 x 600

### Communication Protocol

File: FTP (TCP/IP), SMB v3.0, WebDAV

Email: SMTP, POP3

### File Format

TIFF, JPEG, PDF (Compact, Searchable, Apply policy,  
Optimize for Web, PDF A/1-b, Trace & Smooth, Encrypted,  
Device Signature, User Signature), XPS (Compact,  
Searchable, Device Signature, User Signature), Office  
Open XML (PowerPoint, Word)

## Fax Specifications

### Maximum Number of Connection Lines

2

### Modem Speed

Super G3: 33.6 Kbps  
G3: 14.4 Kbps

### Compression Method

MH, MR, MMR, JBIG

### Resolution (dpi)

400x400 (Ultra Fine), 200x400 (Super Fine), 200x200 (Fine), 200x100 (Normal)

### Sending and Recording Size

Statement to Legal

### Fax Memory

Up to 30,000 Pages (2,000 jobs)

### Speed Dials

Max. 200

### Group Dials/Destinations

Max. 199 Dials

### Sequential Broadcast

Max. 256 Addresses

### Memory Backup

Yes

## Store Specifications

### Mail Box (Number Supported)

100 User In-boxes, 1 Memory RX Inbox, 50 Confidential Fax In-boxes, Maximum 10,000 Pages (2,000 jobs) Stored

### Advanced Box

Communication SMB or WebDAV

Protocol:

Supported Windows (Windows 8.1/10)  
Client PC:

Concurrent Connections (Max.)

SMB: 64

WebDAV: 3 (Active Sessions)

### Advanced Box Available Disc Space

Approx. 16 GB

## Security Specifications

### Authentication

Standard: Universal Login Manager, uniFLOW Online Express,<sup>14</sup> User Authentication, Department ID Authentication, Access Management System, Device and Function Level Log-in uniFLOW

Optional:

### Data

Standard: Trusted Platform Module (TPM), Hard Disk Password Lock, Hard Disk Drive Erase, Mail Box Password Protection, Hard Disk Drive Encryption (FIPS140-2 Validated), Verify System at Startup,<sup>3</sup> McAfee Embedded Control<sup>13</sup>

Optional: IEEE 2600.2 Common Criteria Certification, Data Loss Prevention (Requires uniFLOW)

### Network

Standard: Encrypted Secure Print, IP/Mac Address Filtering, IPsec, TLS Encrypted Communication (v1.0/1.1/1.2/1.3), SNMP V3.0, IEEE 802.1X, IPv6, SMTP Authentication, POP Authentication before SMTP, S/MIME, SIEM Integration

### Document

Standard: Secure Watermarks, Secure Print, Adobe LiveCycle<sup>®</sup> Rights Management ES2.5 Integration, Encrypted PDF, Encrypted Secure Print, Device Signature User Signatures

Optional:

## Environmental Specifications

### Operating Environment

Temperature: 50 to 86 °F

Humidity: 20 to 80% RH (Relative Humidity)

### Power Requirements

110-127V AC 60 Hz, 6.9 A

### Plug (Main Unit)

NEMA 5-15P

### Power Consumption

Maximum: Approx. 1,500 W

Standby: Approx. 38.9 W<sup>15</sup>

Sleep Mode: Approx. 0.8 W or Less<sup>16</sup>

Typical Electricity Consumption (TEC) Rating<sup>17</sup>

C357iF: 0.36 kWh

C257iF: 0.25 kWh

### Standards

ENERGY STAR<sup>®</sup> Certified

Rated EPEAT<sup>®</sup> Gold<sup>5</sup>

## Consumables

### Toner

NPG-58 Toner

### Toner Yield (Estimated @ 5% Coverage)

Black: 23,000 Pages

Color (C, M, Y): 18,000 Pages

<sup>1</sup> Subscription to a third-party cloud service required. Subject to third-party cloud service providers' Terms and Conditions.

<sup>2</sup> Third-party SIEM system required. Subject to third-party SIEM system's Terms and Conditions. Canon cannot ensure compatibility with all third-party SIEM systems.

<sup>3</sup> This feature is off by default and must be turned on by the user. Warm-up times are affected once turned on.

<sup>4</sup> Requires additional option.

<sup>5</sup> For current EPEAT rating (Gold/Silver/Bronze), please visit [www.epeat.net](http://www.epeat.net).

<sup>6</sup> Time from device power-on until copy ready (not print reservation).

<sup>7</sup> Time from exiting Sleep Mode to when printing is operational.

<sup>8</sup> Time from device power ON to when the copy icon appears and is enabled to operate on the touch panel display.

<sup>9</sup> Includes consumables.

<sup>10</sup> Requires the optional PCL International Font Set-A1.

<sup>11</sup> Requires the optional Barcode Printer Kit-D1.

<sup>12</sup> Other operating systems and environments, including AS/400, UNIX, Linux, and Citrix may be supported. Some of these solutions are chargeable. SAP Device Types are available via the SAP Market Place. For more information, contact your authorized sales representative.

<sup>13</sup> Multi-Sheet Feed Detector Supported.

<sup>14</sup> No charge for this solution; however, activation is required.

<sup>15</sup> Reference value (measured one unit).

<sup>16</sup> 0.8 W Sleep Mode not available in all circumstances due to certain settings.

<sup>17</sup> Based on ENERGY STAR Product Specification for Imaging Equipment Version 3.0.

**NOVATECH**   
BRING EVERYTHING UP TO SPEED

 **Canon**  
SEE IMPOSSIBLE

 **McAfee**  
PROTECTED

 **CANON**  
**GENUINE**  
TONER, CARTRIDGE  
& PARTS

 **epeat**  
GOLD 